

YRTS Mini Reset Machine

Instructions

Important Note:

The Mini Machine is **not** touchscreen-enabled. Please use the buttons located below the screen for all operations.

Steps to Operate:**1. Connect to Wi-Fi**

Connect the Mini Machine to Wi-Fi using the setting option on the menu.
Select the network you want to use and enter your password, if required.

2. Software Updates

The Mini Machine will automatically check for new software versions. If an updated version is available, it will download and install to include the latest serial numbers.

3. Upgrade Information**Upgradable Items:**

- **CF258/W2020/W2110/W2310 Series:** Use JIG2 to upgrade
- **W1480/W2100 Series:** Use JIG1 to upgrade

4. Automatic Rework Process

To reset chips, choose "Auto Rework". The Mini Machine automatically identifies chip models. Follow the steps below for specific series:

CF258/W2020/W2110/W2310 Series:



1. Place the cartridge with the chip facing you.
2. Hold the Mini screen towards you.

W1480/W2100 Series:

1. The chip features four contact points.
2. Ensure the cartridge is positioned with the two smaller contact points facing the operator to facilitate proper resetting.
3. Hold the machine with the screen facing you.
4. Ensure that the four probes make complete contact with the chip's contact points, particularly the smaller ones (labelled 3 and 4). It is sufficient to lightly touch the probe to the contact points; heavy pressure is unnecessary.

5. Resetting Process

1. Press the "PLAY" button located in the center.
2. The machine will detect the chip version and update it to the latest version automatically.
3. The reset will take a few seconds. Once completed, the screen will show "OK" in green.

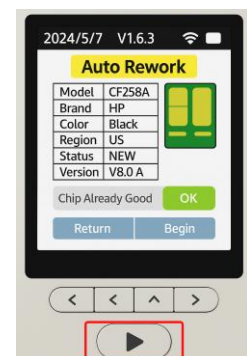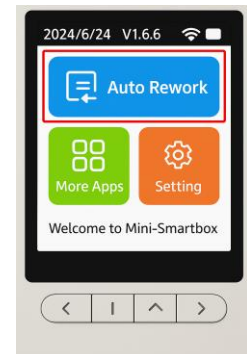

Follow the given instructions for optimal use of your Mini Machine.
For further inquiries or assistance, contact the support team or refer to additional manuals.

JIG1**JIG2****Low-risk Items:**

- **W1340/W1410/W1380 Series:** These models currently present a minimal risk for upgrade and are not capable of being upgraded. There is no necessity for upgrading, as there is no firmware that blocks compatible cartridges. These items can be sold directly, and other chip suppliers are unable to upgrade them using the machine.